




Wuxi NSB Transmission Technology Co.,...

55 mm x 100 mm x 21 mm NTN 6211ZZ deep groove ball bearings

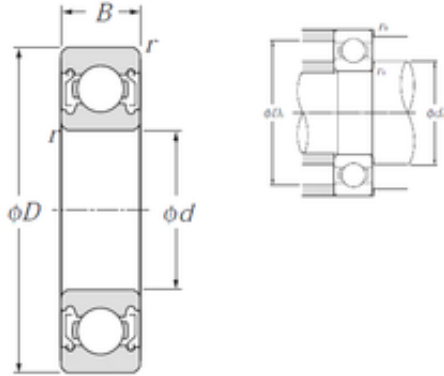

Bearing No. 6211ZZ

6211ZZ Bearing 2D drawings and 3D CAD models

Size	55x100x21 mm
Bore Diameter	55 mm
Outer Diameter	100 mm
Width	21 mm
d	55 mm
D	100 mm
B	21 mm
C	21 mm
rn	0,5 mm
r min.	1,5 mm
da min.	63 mm
da max	67 mm
Da max.	92 mm
ra max.	1,5 mm
Weight	0,601 Kg
Basic dynamic load rating (C)	43,5 kN
Basic static load rating (C0)	29,2 kN
(Grease) Lubrication Speed	6 400 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359004847
Product Group	B00308



Wuxi NSB Transmission Technology Co.,...

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	55MM Bore; 100MM Outside Diameter; 21MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Other Features	Deep Groove Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	1.32938
Bore	2.165 Inch 55 Millimeter
Outer Race Width	0.827 Inch 21 Millimeter
Outside Diameter	3.937 Inch 100 Millimeter
Inner Race Width	0 Inch 0 Millimeter
bore diameter:	55 mm
precision rating:	ISO Class 0
outside diameter:	100 mm



Wuxi NSB Transmission Technology Co.,...

finish/coating:	Uncoated
overall width:	21 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	21 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	21 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	6400 rpm
internal clearance:	CN
fillet radius:	1.5 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	7600 RPM
dynamic load capacity:	43500 N
series:	62
static load capacity:	29200 N
manufacturer product page:	Click here