




Wuxi NSB Transmission Technology Co.,...

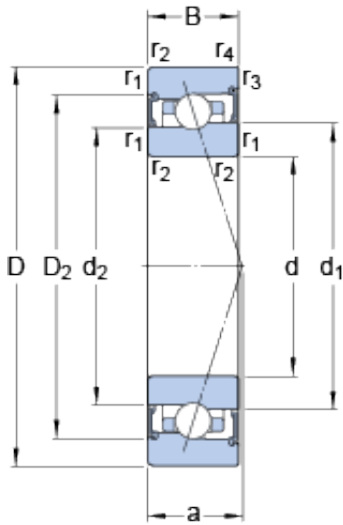

S71920 ACB/P4A Bearing 2D drawings and 3D CAD models

100 mm x 140 mm x 20 mm SKF S71920
ACB/P4A angular contact ball bearings

Bearing No. S71920 ACB/P4A

Size	140x100x20 mm
Bore Diameter	140 mm
Outer Diameter	100 mm
Width	20 mm
d	100 mm
D	140 mm
B	20 mm
d ₁	114.92 mm
d ₂	113.16 mm
D ₂	128.7 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
a	41.4 mm
d _a - min.	106 mm
d _a - max.	114.2 mm
d _b - min.	106 mm
d _b - max.	112.5 mm
D _a - max.	134 mm
D _b - max.	136.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
Basic dynamic load rating - C	20.8 kN
Basic static load rating - C ₀	21.2 kN
Fatigue load limit - P _u	0.815 kN



Wuxi NSB Transmission Technology Co.,...

Limiting speed for grease lubrication	11000 r/min
Ball - D_w	7.938 mm
Ball - z	37
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	125 N
Preload class B - G_B	250 N
Preload class C - G_C	750 N
Calculation factor - f	1.11
Calculation factor - f_1	0.99
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.07
Calculation factor - f_{HC}	1
Preload class A	157 N/micron
Preload class B	202 N/micron
Preload class C	306 N/micron
d_1	114.92 mm
d_2	113.16 mm
D_2	128.7 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	106 mm



Wuxi NSB Transmission Technology Co.,...

d_a max.	114.2 mm
d_b min.	106 mm
d_b max.	112.5 mm
D_a max.	134 mm
D_b max.	136.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
Basic dynamic load rating C	27.6 kN
Basic static load rating C_0	33.5 kN
Fatigue load limit P_u	0.815 kN
Attainable speed for grease lubrication	11000 r/min
Ball diameter D_w	7.938 mm
Number of balls z	37
Preload class A G_A	125 N
Static axial stiffness, preload class A	157 N/ μ m
Preload class B G_B	250 N
Static axial stiffness, preload class B	202 N/ μ m
Preload class C G_C	750 N
Static axial stiffness, preload class C	306 N/ μ m
Calculation factor f	1.11
Calculation factor f_1	0.99
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.07
Calculation factor f_{HC}	1
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38



Wuxi NSB Transmission Technology Co.,...

Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.88 kg